

Accessories

Fast Acting,
(Type W) UL 125V



"W" Fuse

| MARS NO. | DESCRIPTION | MARS PACK | CASE QTY. |
|----------|------------------|-----------|-----------|
| 82360 | 10a, W plug fuse | 4 | 100 |
| 82363 | 15a, W plug fuse | 4 | 100 |
| 82364 | 20a, W plug fuse | 4 | 100 |
| 82365 | 25a, W plug fuse | 4 | 100 |
| 82366 | 30a, W plug fuse | 4 | 100 |

Dual Element,
Time Delay Fuse -
Type W Clamshell
Packaging For
Merchandisers



| MARS NO. | DESCRIPTION | MARS PACK |
|----------|-------------------------------|-----------|
| 82756 | 20a, 125V, W plug fuse (6 pk) | 1 |
| 82757 | 25a, 125V, W plug fuse (6 pk) | 1 |
| 82758 | 30a, 125V, W plug fuse (6 pk) | 1 |


Fuse Blocks -
Class H & K 250 Volts



Mersen manufactures the highest quality 250 to 600 volt fuse blocks handling current capacities of 30 to 600 amperes. These durable fuse blocks are designed for class H, J, K, R, CC and Midget fuses. All blocks are UL listed and CSA certified.

Mersen fuse blocks feature a unique adder block which can be snapped on to form multi-pole segmented blocks of as many poles as desired. Multiple pole blocks thus formed save valuable space, are permanent, and can be added to in the future.

Fuse block insulators are constructed of either phenolic or molded polycarbonate. Three types of wire connectors are used. Screw type is for copper wire with terminals. Pressure plate type is for bare copper wire where vibration may be a factor. Box type connectors are the most durable and versatile for stranded or solid wire. All fuse clips are one piece high-conductivity tin-plated copper for low resistance connections and cool operation.

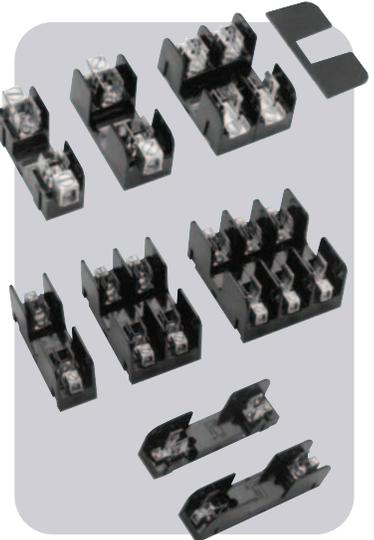


| MARS NO. | DESCRIPTION | MARS PACK | CASE QTY. |
|----------|------------------------|-----------|-----------|
| 83010 | Adder 30 amp - Al box | 1 | 50 |
| 83011 | 1 pole 30 amp - Al box | 1 | 50 |
| 83012 | 1 pole 30 amp - screw | 1 | 50 |
| 83013 | 2 pole 30 amp - screw | 1 | 50 |
| 83017 | 2 pole 60 amp - Al box | 5 | 25 |
| 83018 | 3 pole 60 amp - Al box | 5 | 25 |

Fuse Blocks -
Midget Fuses 600 Volts



Mersen power distribution blocks (pdb), afford a safe, convenient way of splicing cables, splitting primary power into a variety of secondary circuits or providing a fixed junction tap - off point. Insulators are virtually unbreakable polycarbonate. Standard aluminum box connectors accommodate aluminum and copper wire. Connector bars are all one piece and tin plated. The pdbs are UL listed and CSA certified.

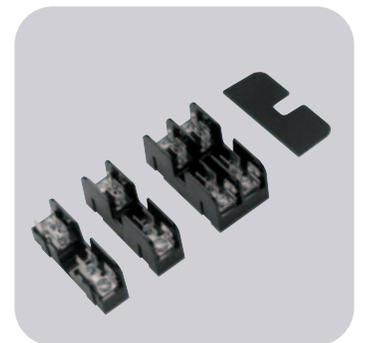

| MARS NO. | DESCRIPTION | MARS PACK | CASE QTY. |
|----------|-----------------------|-----------|-----------|
| 83061 | 1 pole 30 amp - screw | 1 | 50 |
| 83062 | 2 pole 30 amp - screw | 1 | 25 |
| 83063 | 3 pole 30 amp - screw | 1 | 25 |
| 83065 | 1 pole 30 amp - plate | 1 | 50 |
| 83066 | 2 pole 30 amp - plate | 1 | 25 |
| 83067 | 3 pole 30 amp - plate | 1 | 25 |