

# 26" Packaged Terminal AC/HP

Our 26" packaged terminal air conditioners and heat pumps provide year 'round comfort, room by room, for hotels, motels, apartments, office buildings, schools, nursing homes and more. Designed for quick installation in most 16" x 26" wall sleeves, they're great for new construction as well as replacements, especially where a standard 42" PTAC may be too large.

Combining attractive appearance with state-of-the art technology, these units minimize energy usage while ensuring guest comfort. Available in cooling only, electric heat and heat pump versions.

For installation flexibility, the unit is designed to be controlled either by its' full function on-board control panel or by a wireless remote control.

All functions of the unit can be controlled in-room using the easy-to-understand touchpad. LEDs correspond to mode and fan operation, indicating unit status, and the setpoint temperature is adjusted with up and down arrows—61 to 86° F.

## FEATURES

- **Energy Efficient**—High energy efficiency ratios (EERs) save on utility costs; 24 hr on/off timer
- **Environmentally Friendly**—Our packaged terminal units come charged with the environmentally friendly R-410A refrigerant
- **Quiet Operation**—Indoor sound reduction is achieved through the unit's two permanently lubricated fan motors; compressor has rubber grommet mounting
- **Fresh Air Control Plate**—Allows outdoor air into room through filtered vent, 23 CFM
- **Easy to Service**—On-board computer diagnostics help prolong the life of the unit and simplify service; LED indicator flashes error codes

## PACKAGED TERMINAL AC/HP

**PTTC** - *Cooling only*

**PTTE** - *Cooling only with electric heat*

**PTTH** - *Heat pump with electric heat*

**9,000 to 12,000 BTUH**



*Comfort-Aire*®

## Warranty

5 years on compressor, 5 year on parts  
See warranty document for details or visit [www.comfort-aire.com](http://www.comfort-aire.com)

## MODEL NOMENCLATURE

P T T	C	1 2	C -	1
26" Package Terminal Unit	C = Cooling Only H = Heat Pump E = Electric Heat	Capacity BTUH x 1000	Series/ Revision	Power 1 = 208/230-1-60

## PERFORMANCE AND ELECTRICAL DATA

### 208/230V COOLING ONLY WITH ELECTRIC HEAT

FEATURE	COOLING ONLY		COOLING ONLY WITH ELECTRIC HEAT		HEAT PUMP WITH ELECTRIC HEAT	
	PTTC09B-1	PTTC12B/C-1	PTTE09C-1	PTTE12C-1	PTTH09C-1	PTTH12C-1
Cooling BTUH	9100/9300	11800/12000	9100/9300	11800/12000	9100/9300	11,800/12,000
EER	9.8/9.8	9.8/9.8	9.8/9.8	9.8/9.8	9.7/9.7	9.5/9.5
Cooling Amps	4.7/4.3	6.1/5.7	4.7/4.3	6.1/5.7	4.4/4.8	5.6/6.1
Max. Current Amps	6.1	15.2	15.2	15.2	15.7	15.7
Cooling Watts	930/950	930/950	940/960	1200/1220	930/950	1240/1260
Heat Pump BTUH	/	/	/	/	8400/8600	10,800/11,100
C.O.P. @ 47°F	/	/	/	/	10.2/10.2	9.5/9.5
Heat Pump Amps	/	/	/	/	4.0/4.3	5.4/5.9
Electric Heat Amps	/	/	14/15.2	14/15.2	14.2/15.7	14.2/15.7
Electric Heating Watts	/	/	2900/3500	2900/3500	2950/3600	2950/3600
Power Cord	LCDI 15 amp	LCDI 15 amp	LCDI 20 amp	LCDI 20 amp	LCDI 20 amp	LCDI 20 amp
Dehum. Pts/Hr	2.32	3.49	2.32	3.49	2.32	3.49
Airflow CFM	282/259/235	282/259/235	271/247/224	271/247/224	271/247/224	271/247/224
Indoor Sound Max. dB(A)	69/67/65	69/67/65	69/67/65	69/67/65	69/67/65	69/67/65
Out. Sound Max dB(A)	79/79/79	79/79/79	79/79/79	79/79/79	79/79/79	79/79/79
Net Wt./Shipping Wt. (lbs)	70.5/84	78/92	73/86	81/94	83/96	83/93.7

## Accessories



7602-805F




7602-801F




7602-800F

PART NO.	DESCRIPTION
7602-800F	Wall Sleeve, SnapEase, Steel, 26" insulated
7602-801F	Stamped Grille, Alum, 26"
7602-805F	Architectural Grille, Alum, 26", Color-Clear

## FEATURES

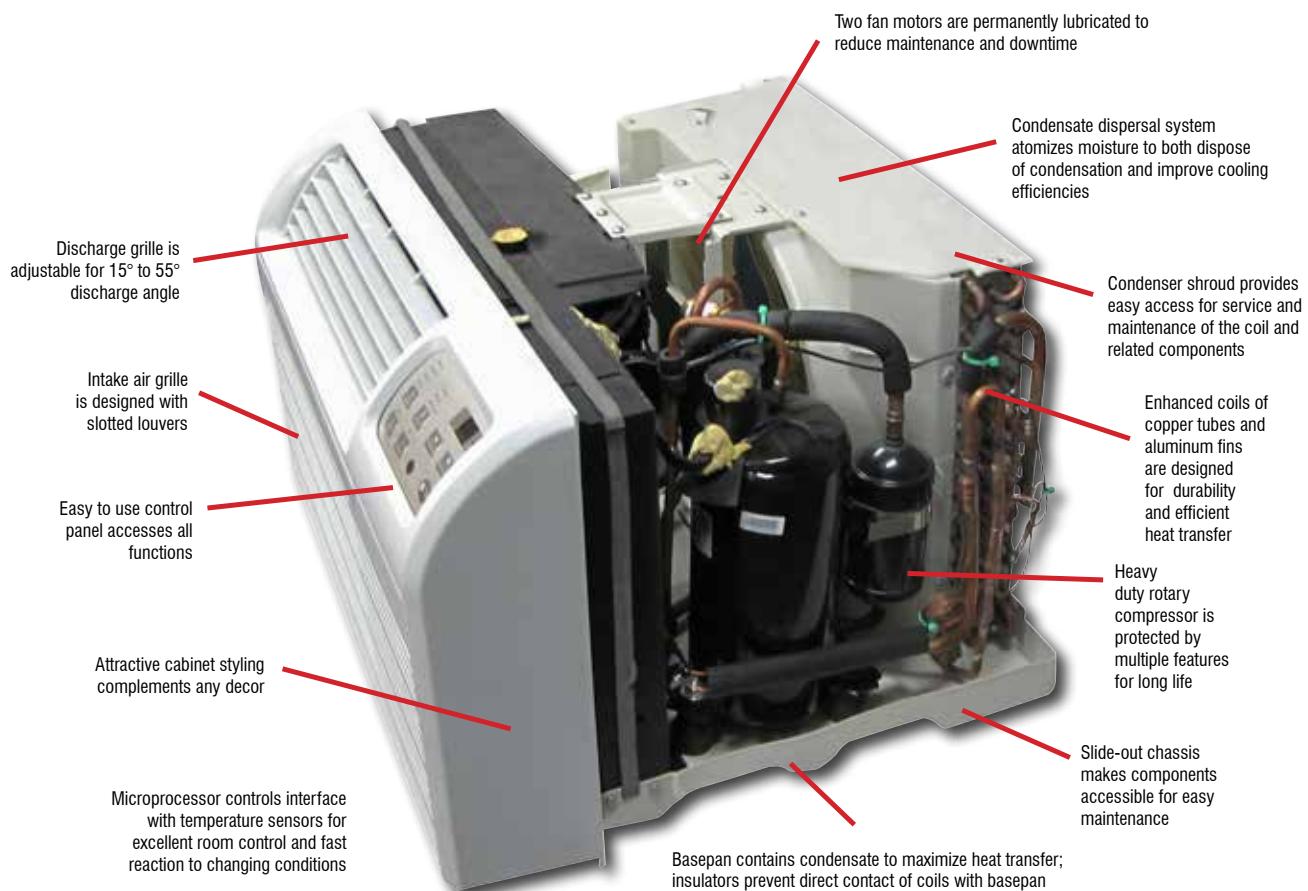

*Thermostatically controlled drain valve allows defrost water to drain in heat mode.*



*Reversible fresh air filter provides 23 cfm of fresh air exchange.*



**Unit Dimensions:**  
26" W  
15.6" H  
21.2" D (without sleeve)

*The one-piece filter design provides enhanced air filtration. Conveniently located on the front of the unit, filters can be easily removed for cleaning.*




*LED display and touchpad buttons are simple to understand and easy to use.*

## Accessories Continued

### Thermostat Adapter

**Part No. 7602-806**


The thermostat adapter allows for any thermostat to be used for precise temperature control. It wires into the units control board and has convenient up front terminals for easy access.



### Drain Kit

**Part No. 7602-506F**

The drain kit, including both 90° drain tube and a 180° drain tube, can be used for either an internal or external drain and can be attached to one of two available outlets on the wall sleeve. The mounting plates are made from galvanized steel and powder coated to match the wall sleeve.

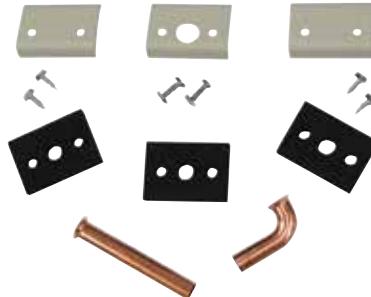

Models in this brochure are certified directly with the United States Dept. of Energy (D.O.E.) as meeting specifications shown.

"This product complies with all California product labeling laws including, but not limited to, the Safe Drinking Water and Toxic Enforcement Act of 1986, more commonly known as Proposition 65."

*Due to ongoing product improvements, specifications and dimensions are subject to change and correction without notice or incurring obligations. Determining the application and suitability for use of any product is the responsibility of the installer. Additionally, the installer is responsible for verifying dimensional data on the actual product prior to beginning any installation preparations.*

*Third party incentive and rebate programs have precise requirements as to product performance and certification. All products meet applicable regulations in effect on date of manufacture; however, certifications are not necessarily granted for the life of a product. Therefore, it is the responsibility of the applicant to determine whether a specific model qualifies for these incentive/rebate programs.*