



MANUFACTURED HOUSING GAS FURNACES

*MG2R*A - Downflow Without Coil Box*

*MG2R*B - Downflow With Coil Box*

*MG2R*C - Downflow With Coil Box*

Unique Manufactured Housing Design with a robust, 19-7/8" W, fully-insulated cabinet to fit the standard MH footprint; the MG2R is our flagship high-efficiency, gas furnace.

AC-Ready 4-Ton ECM Blower with 5-speed taps, with/without a factory-installed 27 1/4"H coil box; allowing for a field-installed 20"H or 26"H coil box to suit your capacity and access needs. (See CMH-Series Coil Specifications Sheet or visit www.marsdeliversratings.com for available AHRI-rated coil-fit matches)

Quick LP Conversion with an easy-access gas valve regulator and manifold, using the factory-provided LP orifices included in the unit-literature kit.

Category IV Venting Approval allows for vertical or horizontal direct venting using an approved non-metallic two-pipe system for application flexibility.



MG2R*A

MG2R*B/C



Warranty—1 year labor, 2 years on parts, 10 years on heat exchanger
(Some limitations apply; see printed warranty for details.)



www.comfort-aire.com

MG2R 95% AFUE SINGLE-STAGE GAS FURNACES

Model #	Coil Box, Air Return	Input	Heating Capacity	Dimensions H x D x W	Shipping Dimensions H x D x W	Ship Wt.	Orifice ²		
							NG	LP	Qty
MG2R-045F1AAM*	None, Front ¹	45 MBH	43 MBH	56" x 24-5/8" x 19-7/8"	58-1/8" x 26-1/2" x 21-5/16"	150 lb.	49	57	3
MG2R-060F1AAM*	None, Front ¹	60 MBH	57 MBH	56" x 24-5/8" x 19-7/8"	58-1/8" x 26-1/2" x 21-5/16"	150 lb.	45	55	3
MG2R-072F1AAM*	None, Front ¹	72 MBH	68 MBH	56" x 24-5/8" x 19-7/8"	58-1/8" x 26-1/2" x 21-5/16"	155 lb.	47	56	4
MG2R-045F1ABM*	20"H, Front	45 MBH	43 MBH	76" x 24-5/8" x 19-7/8"	78-1/8" x 26-1/2" x 21-5/16"	170 lb.	49	57	3
MG2R-060F1ABM*	20"H, Front	60 MBH	57 MBH	76" x 24-5/8" x 19-7/8"	78-1/8" x 26-1/2" x 21-5/16"	170 lb.	45	55	3
MG2R-072F1ABM*	20"H, Front	72 MBH	68 MBH	76" x 24-5/8" x 19-7/8"	78-1/8" x 26-1/2" x 21-5/16"	175 lb.	47	56	4
MG2R-045F1ACM*	27"H, Front	45 MBH	43 MBH	76" x 24-5/8" x 19-7/8"	78-1/8" x 26-1/2" x 21-5/16"	170 lb.	49	57	3
MG2R-060F1ACM*	27"H, Front	60 MBH	57 MBH	76" x 24-5/8" x 19-7/8"	78-1/8" x 26-1/2" x 21-5/16"	170 lb.	45	55	3
MG2R-072F1ACM*	27"H, Front	72 MBH	68 MBH	76" x 24-5/8" x 19-7/8"	78-1/8" x 26-1/2" x 21-5/16"	175 lb.	47	56	4

1) If adding a central air split system, you must also order a separate field-installed coil box.

2) Orifice will vary with altitude; consult the unit installation instructions for correct orifice selection for your application and altitude.

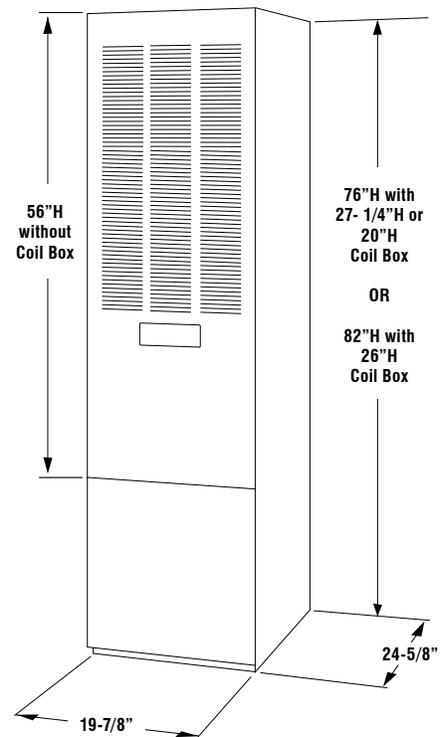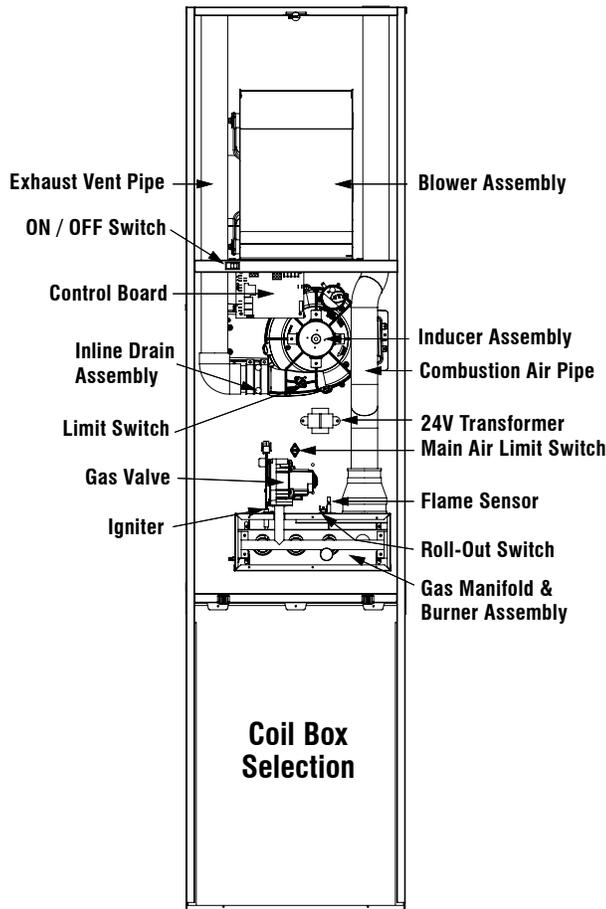

"This product complies with all California product labeling laws including, but not limited to, the Safe Drinking Water and Toxic Enforcement Act of 1986, more commonly known as Proposition 65."

Due to ongoing product improvements, specifications and dimensions are subject to change and correction without notice or incurring obligations. Determining the application and suitability for use of any product is the responsibility of the installer. Additionally, the installer is responsible for verifying dimensional data on the actual product prior to beginning any installation preparations.

Third party incentive and rebate programs have precise requirements as to product performance and certification. All products meet applicable regulations in effect on date of manufacture; however, certifications are not necessarily granted for the life of a product. Therefore, it is the responsibility of the applicant to determine whether a specific model qualifies for these incentive/rebate programs.